

SO-239 angular connector

TECHNICAL DATA

Frequency Range: DC - 600 MHz
Impedance: $50 \pm 2 \Omega$
Connectors: UHF-Female, gold plated central pin
Materials: Nickel Plated Brass, PTFE insulator, Stainless Steel
Mounting Hole: $\varnothing 16\text{mm}$, $\varnothing 5/8\text{ in}$
Operating Temperature: -40°C to $+80^{\circ}\text{C}$




Universal Mounting



HI-QUALITY ANTENNAS MADE IN ITALY

SIRIO's
product
assembly

Other's
product
assembly

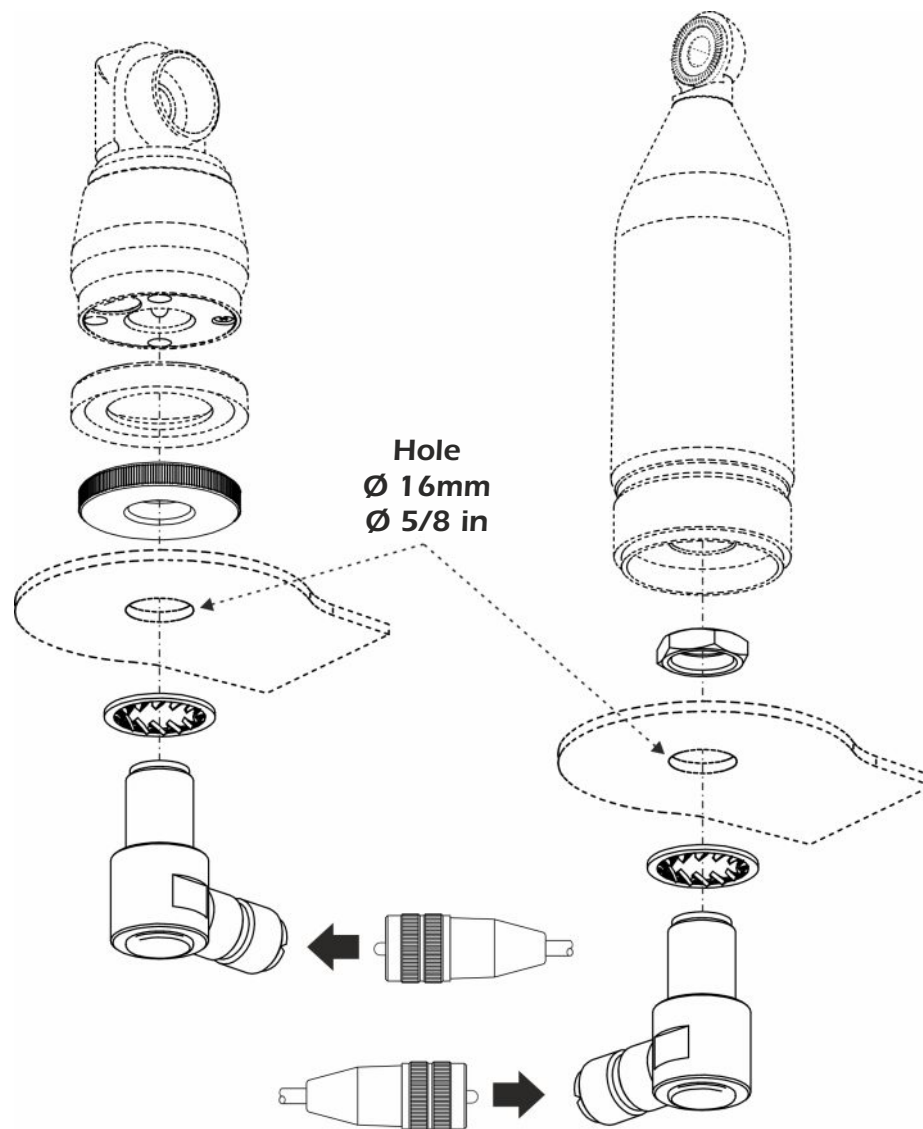

Technical Data are subjected to change - Printed in ITALY - Rev. 26/11/2019 - Cod. ID467