

OMNI 900 6 dBi

Base Station GSM 900 and ISM 868MHz Antenna



Installation Manual

DESCRIPTION

Base station antenna conceived for GSM 900MHz and ISM 868MHz systems. The radiant element is made on PCB and raw brass to guarantee high power and low losses. It is protected by fibreglass tube and supplied with a stainless steel bracket for an easy installation.

SPECIFICATIONS

Electrical Data


Type	:	3 x 1/2 λ Colinear Dipole Array
Frequency Range	:	868-960 MHz for GSM 900MHZ and ISM 868 systems
Impedance	:	50 Ω Unbalanced
3 dB Beamwidth Horizontal	:	H-plane 18°
Radiation Angle	:	5°
Polarization	:	Linear Vertical
Max gain	:	3.9 dBd - 6 dBi
V.S.W.R. in Bandwidth	:	≤ 2:1
Max Power	:	20 Watts (CW) @ 30° C
Grounding protection	:	All metal part are DC-grounded, the inner conductor shows a DC-short
Connector type	:	SMA-male, other type on request
Cable lenght / type	:	5 m / white RG 58

Mechanical Data


Materials	:	Fiberglass, Chromed brass, PCB
Wind Load / Resistance	:	35 N @ 150 Km/h / 120 Km/h
Wind Surface	:	0.03 m ²
Height (approx.)	:	1045 mm
Weight (approx.)	:	950 gr
Operating Temperature	:	-20° C to +80° C

TYPICAL RADIATION PATTERN in E-plane at 920 MHz

File: E-03-032 Scale: logarithmic

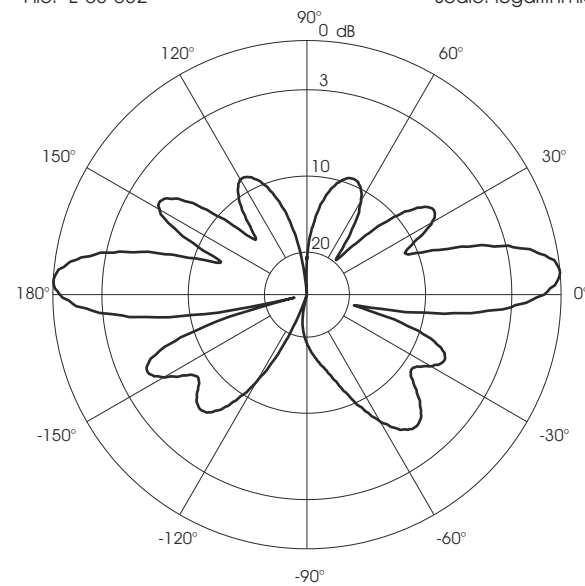

TYPICAL S.W.R. RESPONSE

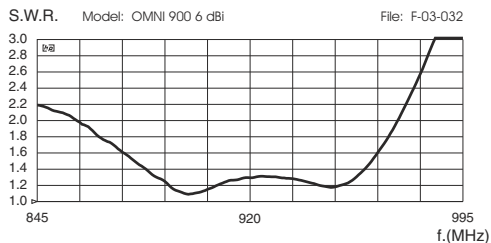

TYPICAL GAIN DIAGRAM vs FREQUENCY

